


FLEXER FLX

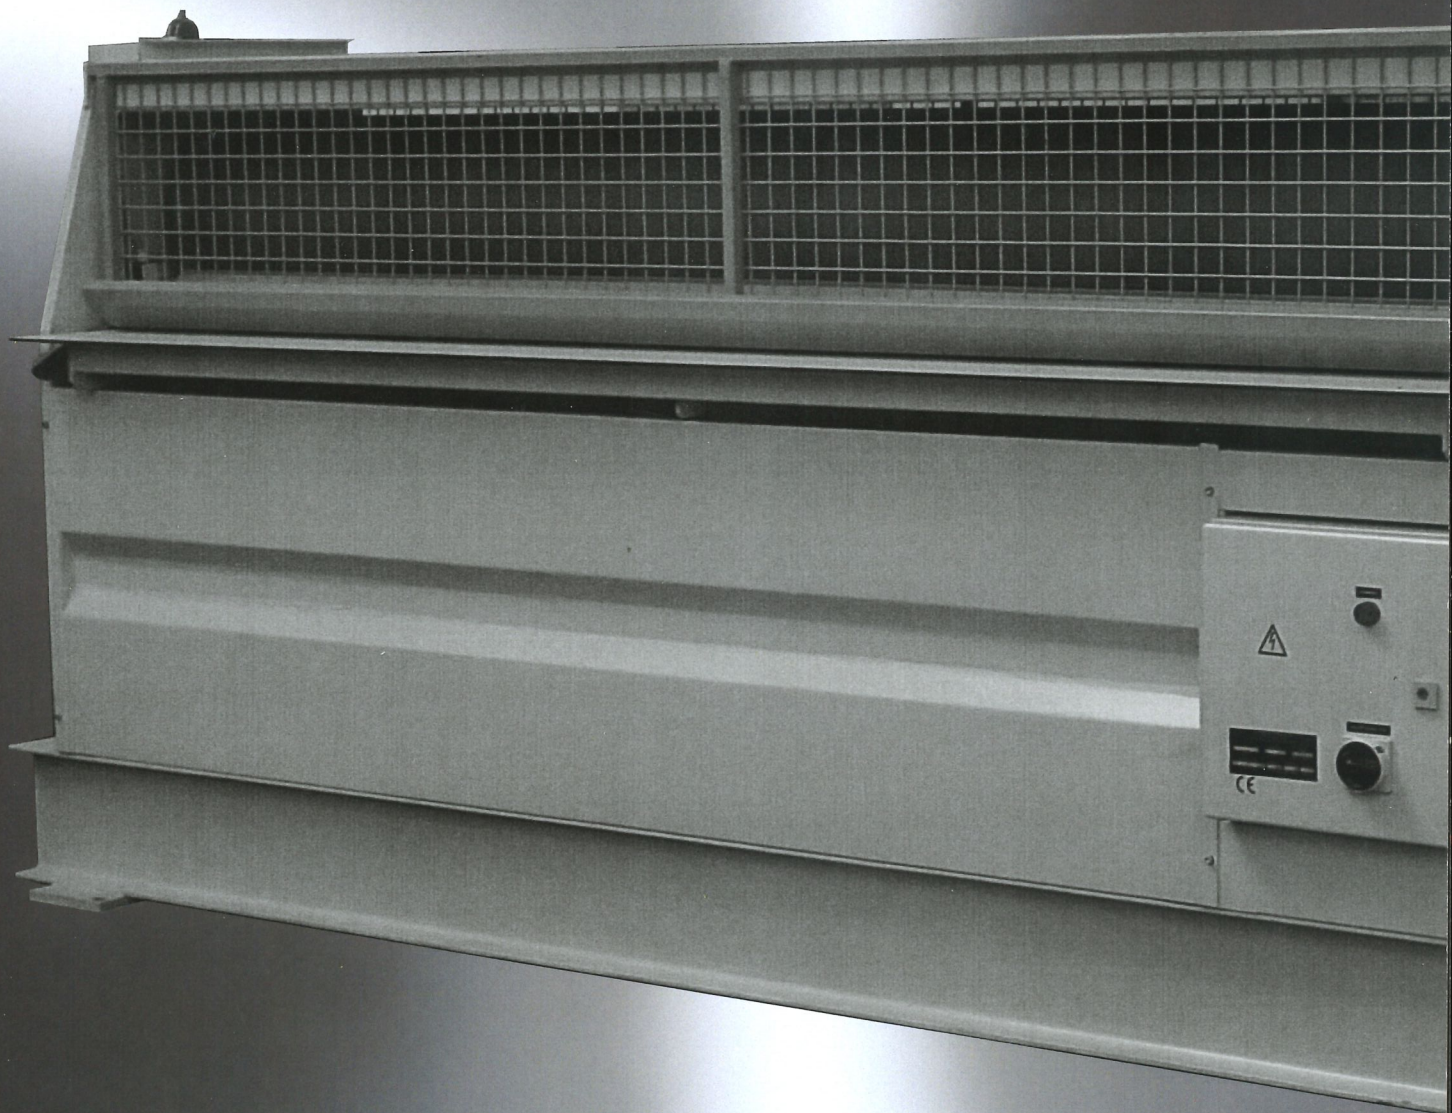

HÖFER

Quality is our Policy

FLEXER FLX


The machine that conditions your veneer - making it pliable and supple, allowing you to respond to new ranges of application.

After undergoing special preparatory treatment, the structure of the veneers has changed substantially.

Thanks to the change in structure, post-forming quality can be achieved. The veneer can easily be wrapped around tight bends without cracking or breaking.

Decisive advantages regarding flexed veneers:

- + maximum pliability
- + no glue penetration
- + low glue consumption
- + utilization of even extremely thin veneers

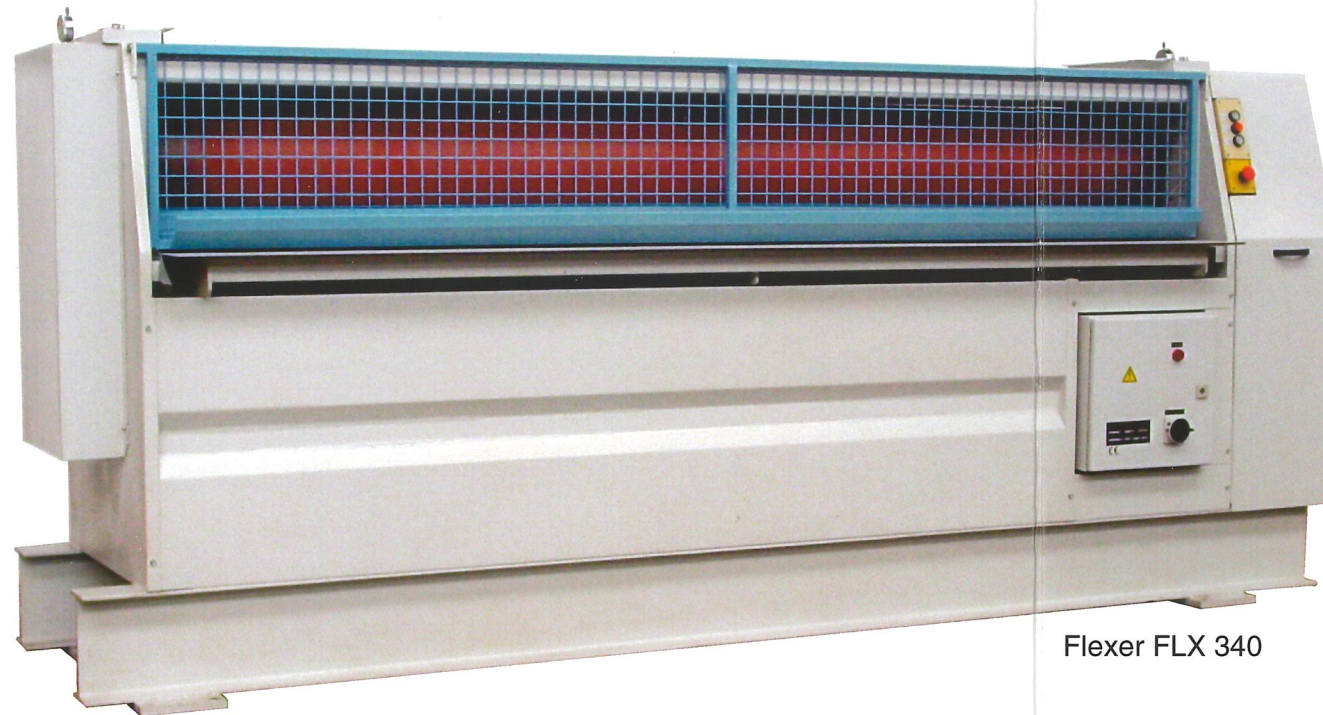

Flexer FLX 340

Options:

- **Multihead - Flexer** for serial production
- **automatic veneer transport unit**

Technical data

	Working Width (mm)	Dimension (l x w x h)	Weight (approx. kg)
FLX 100	900	1800 x 1000 x 1700 mm	1400
FLX 260	2600	3400 x 1000 x 1700 mm	3800
FLX 340	3400	4200 x 1000 x 1700 mm	4200
FLX 380	3800	4600 x 1000 x 1700 mm	4600
Feed speed:	3.5 - 23.5 m/min. (11 - 77 ft./min.)		
Feed motor capacity:	1.5 kW (2 HP)		
Max. workpiece thickness:	2 mm (0.08 inch)		

Note: Because of our policy to continuously improve HÖFER products, technical data and specifications contained herewith are not to be regarded as binding but as a generally correct representation of our products.



Flexer FLX 100



Multihead Flexer



The machine that makes veneer pliable and supple for a variety of applications.


Before the veneer is put through the flexer, it must be pre-treated. In both the temperature and pressure preliminary treatment, the backer is applied to the veneer. The properties of the veneer are changed without influencing the appearance of the veneer.

Due to the change in structure, post-forming quality can be achieved. This veneer can be wrapped around tight bends without splitting or cracking.


A multi-head flexer, which increases the yield, has been designed especially for serial production.

Work principle

Type FLX

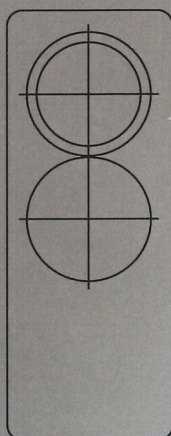

Type FLX-MH

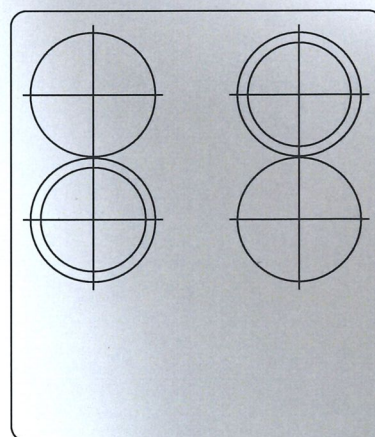

Quality is our Policy

Ing. Gerhardt Höfer & Co.
MaschinenproduktionsgmbH.
A-4753 Taiskirchen
Austria
Telefon: ++43 (0)7764 / 7351-0
Telefax: ++43 (0)7764 / 7570
Internet: www.hoefer-maschinen.com
E-mail: office@hoefer-maschinen.com