




**Art. 2024**  
Oleodynamic press with hot platens - Mod. "SCF/10"

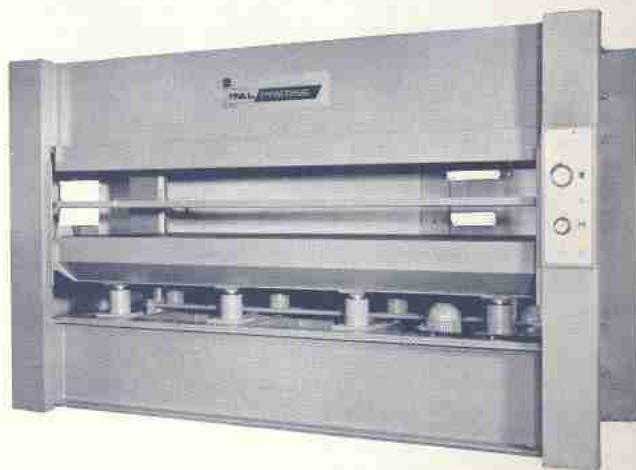

**Art. 2025**  
Oleodynamic press with hot platens - Mod. "SCF/8"

<b>Technical data</b>		<b>"SCF/8" and "SCF/10"</b>	
Useful dimensions	<b>3500 x 1300</b>	mm.	
Pressure cylinders	No. 8	No. 10	
Total pressure	Tonn. 180	Tonn. 210	
Opening stroke	400 mm	400 mm.	
Motor power	HP 5,5	HP 5,5	
Overall dimensions			
Length x width x height	4200 x 1500 2245	4700 x 1500 2525	

Useful dimensions	<b>3300 x 1300</b>	mm.	
Pressure cylinders	No. 8		
Total pressure	180	Tons.	
Opening stroke	400	mm.	
Motor power	5,5	HP	
Overall dimensions			
Length x width x height	4000 x 1500 x 2195 mm.		

Useful dimensions	<b>3000 x 1300</b>	mm.	
Pressure cylinders	No. 8		
Total pressure	180	Tons.	
Opening stroke	400	mm.	
Motor power	5,5	HP	
Overall dimensions			
Length x width x height	3680 x 1500 x 2145 mm.		

## PLATENS HEATING

1. Hot water for temperatures up to 90°-100°  
with wood or coal boyler

All our machines can be realized with following optional solutions:  
with electric boyler  
with boyler as per point 1.

2. Steam or diathermic oil for high temperatures:  
in this case the heating platens are realized in bored sheets.

3. Electric resistors for temperatures up to 120°:  
the platens are in aluminium with incorporated resistors.

- B) Opening and stroke can be of mm. 650 for "SCF/" types.  
C) Automatism with timer for the automatic opening at press cycle end.  
D) Exclusion unit of the end cylinders for machines with 8/10 cylinders.

### By request:

- E) Hot water up to 105°-110° only with machines with electric boyler.