








High-tech edge processing

ADVANTAGE
ADVANTAGE

The easyway of
2612 edge processing
3212

 **IMA**

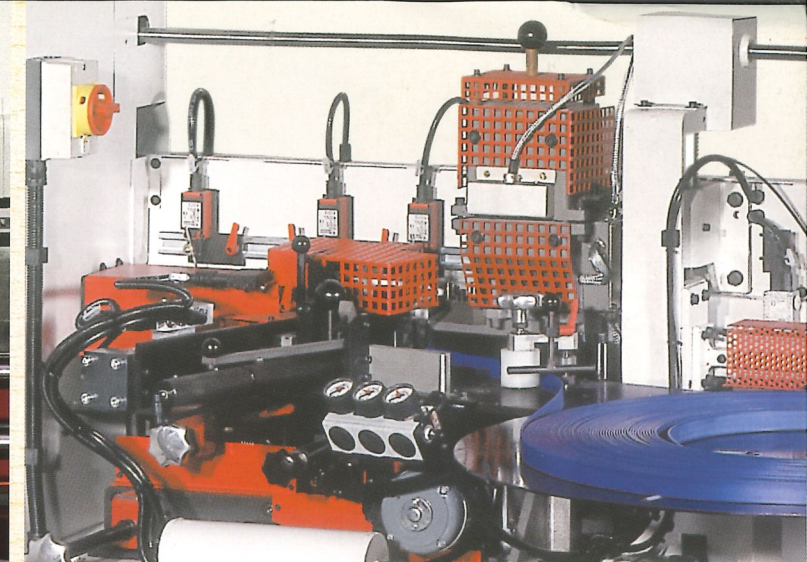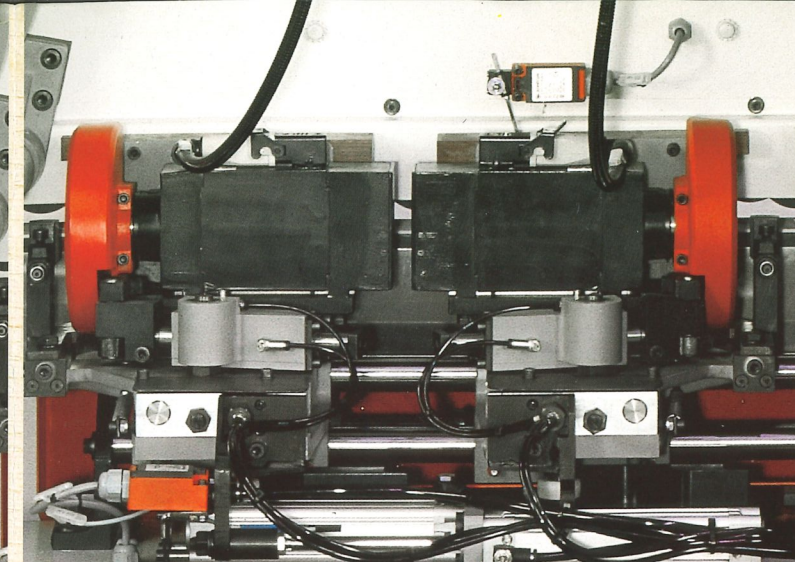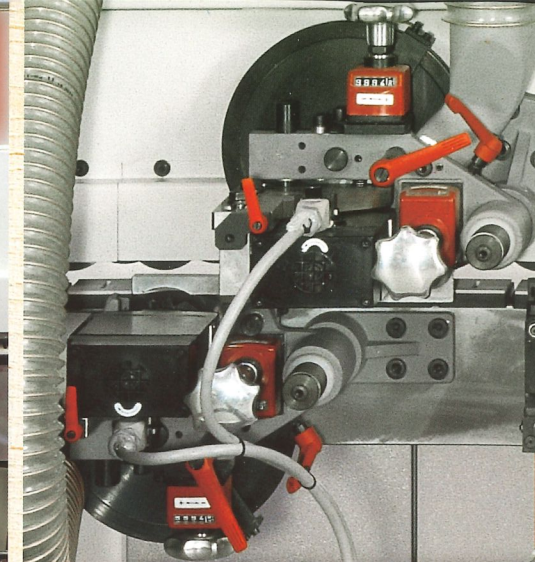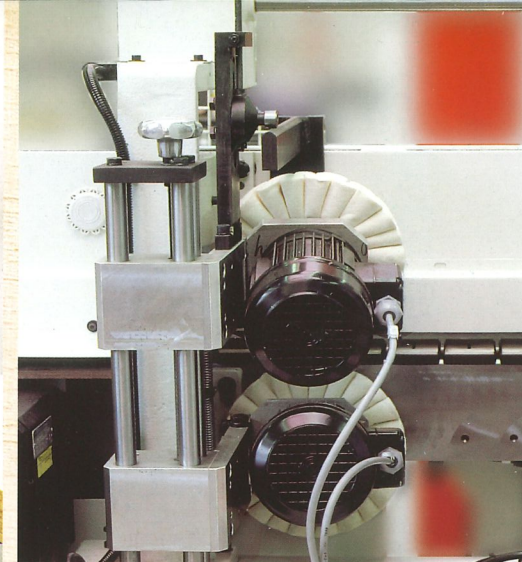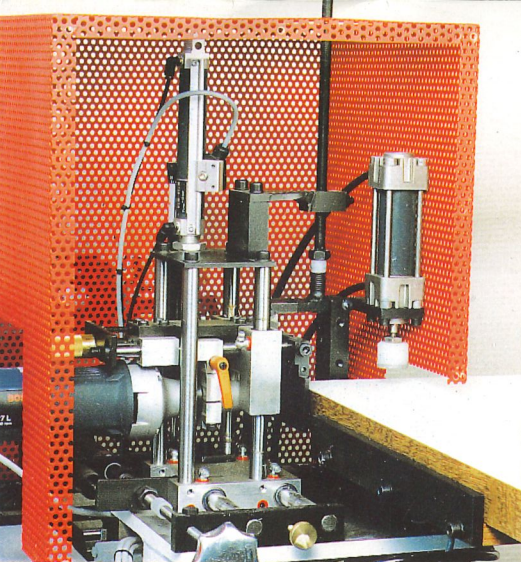

Contour trimming

(Option: mounted separately)

This unit is used for contour trimming on profiles up to 20 mm depth like postformed/softformed or thick edgings

Buffing


Large buffing wheels clean the area of the upper and lower panel edge and ensure a perfect finish

Chamfer, radius and flush milling

With the varying types of edgings, the unit can easily and precisely be set to chamfer, radius or flush milling


End trimming

Precisely guided to end-trim the leading/trailing edges either at a 90 degree angle or with a chamfer

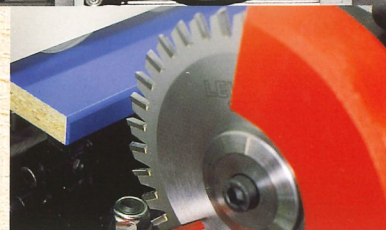

Edge banding unit


With very little set-up work, all edging materials up to 12 mm can be processed

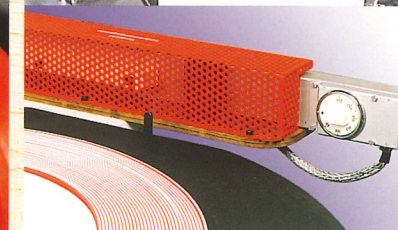

IMA quality for up to 12 mm thick edgings – processed on sturdy and durable machines


Advantage 2612

– the basic model with a maximum of six working units

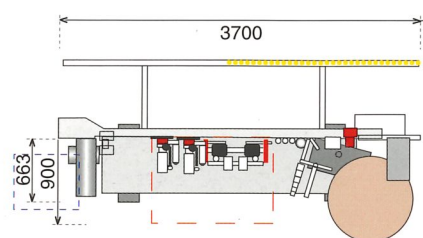


Advantage 3212

– the universal model for all common edging materials

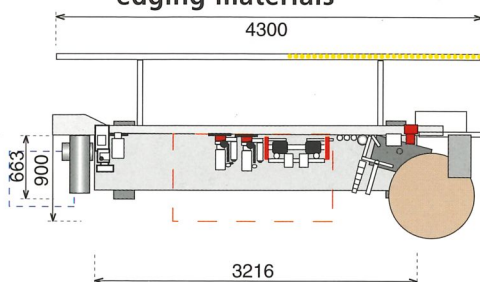


Infeed fence


With varying temperatures, the heated infeed fence ensures optimum edge banding quality




Buffing




Flat scraper




Profile scraper



Chamfer, radius and flush milling



End trimming



Edge banding

Technical data

Advantage 2612 and 3212

Feedrate	12 m/min	
Maximum lipping thickness	12 mm	
Panel dimensions		
Minimum width	60 mm	
Minimum length	150 mm	
Maximum thickness	50 mm	
Minimum edge band length	300 mm	(solid wood band)
Maximum edge band thickness	12 mm	
Sound level measured at operator's position		85 + 4 dB(A)



IMA Klessmann GmbH
Holzbearbeitungssysteme

P.O. Box 12 46, D-32292 Lübbecke
Industriestraße 3, 32312 Lübbecke, Germany
Fon ++49/57 41/331-0
Fax ++49/57 41/42 01
contact@ima.de; <http://www.ima.de>

We reserve the right to make technical changes and improvements at any time without notice. The machine photographs also show options which are not part of the basic model. In each case the quotation text or order confirmation shall apply! The machine has been photographed without the complete protective devices, but these are included in the scope of supply.